

Output Power
Factor 1

IN-DSP SERIES 20KVA/KW - 200 KVA/KW THREE PHASE

- Modular Design
- Redundant UPS System



EN50091 (1,2,3); IEC62040 (1,2,3); IEC/EN/AS60950;
(IEC/EN/AS60146 series);
IEC/EN/ AS61000 series and 60950

COMPUTER POWER[®]

The Next Level in Digital Convergence[®]

Modular UPS System 20 KVA/KW up to 200 KVA/KW

Models For: 200 / 208 / 220 VAC / 60 Hz

- The UPS that grows with your business.
(Grows up to 600 KVA/KW with Three System Cabinets)
- Ideal for Industrial Applications

Features:

- Modular Design N+X.
- Hot Swap Plug-In Electronic Module.
- True On-Line.
- Parallel Capability.
- Redundant Capability.
- Double-conversion Three Level Inverter Topology.
- Green and clean power.
- High efficiency.
- High Input power factor (>0.99).
- Low input THDi (<3%).
- Strong load adaptability for linear and non linear load.
- Intelligent module and system protection design.
- Very low noise system design.
- Double DSP controller for individual power module.
- Digital control for all parts including rectifier, inverter, charger and discharger.
- IGBT modules are applied in the power module.
- Battery cold start function.
- Inbuilt switch for cabinet input, output and maintenance connection.
- Large touch screen LCD with plenty information.
- Independent charger for batteries, intelligent battery management system.
- Digital paralleling technology, very low circulating current between modules.
- Totally front access, top and bottom cable connection.
- Each individual module is configured with independent controller, to avoid single point of failure risk.
- Friendly generator interface.

COMPUTER POWER[®]

A member of SY-G Corporation

Modular UPS System Grows from 20 KVA/KW up to 200 KVA/KW

With 3 System Cabinets grows up to 600 KVA/KW

**COMPUTER
POWER®**

A member of SY-G Corporation

Computer Power is a modular and online double conversion UPS designed for sensitive equipments. The power rating ranges from 20KVA to 200KVA which delivers the best combination of reliability, functionality, flexibility and features, hot-swappable and flexibility at a competitive price. It is designed specially for datacenters, computer systems or critical equipments. As the result of state of art design, this innovative and reliable power system absolutely meets the market requirements.

Computer Power modular UPS combines latest IGBT three-level technology together with DSP control. Along with high input power factor, low THDi and high system efficiency, this product achieves very high adaptability for all kinds of loads. The modular design ensures reliable and trouble free operation for critical loads. Power expansion is very easy to achieve by adding modules to the system to reach 200KVA power in a single frame. It is possible to connect three frames in parallel in order to reach maximum 600KVA.

Modular Construction Design

Each power module is designed to be hot swappable which makes the power expansion and system maintenance easier. Each module is independently self controlled, thus avoiding single point failure risk. If any module fails or disconnects, the system keeps operating and supplying power without interruption. It ensures a high level of reliability and protection.

Intelligent Battery Management

Each UPS module is built in with a super charger and the charging power reaches 4000W.

With 10 installed UPS modules, the total charging power rating is 40KW. The charger is controlled by DSP with intelligent digital arithmetic to prolong the lifespan of the batteries.

Easy Operation and Installation

This products offers flexibility during installation time. Consequently, it is very easy to maintain and control which provides the highest reliability and best protection for supplying power. With the large touch screen LCD panel, the user can easily access information of the power modules and system.

Intelligent Protection System

All the power modules and the system are protected simultaneously by hardware and software. All kinds of protection functions are included: under and over current and voltage, temperature, overload, short circuit, etc. The reliability of the power module and the system reaches an incredible high level through all of these technologies.


High Reliability Design

The Integrated IGBT Modules used in the Electronic Power Modules of the IN-DSP product line, (shown in the drawing), is a great technical improvement compared with Discrete Chips (shown in the drawing), because of the component reliability and manufacture consistency. Among other technical benefits, important Low-Loss integrated three-level IGBTs modules help increase system efficiency, plus reliability is increased due to lower temperatures on IGBTs and their heatsinks.

In the case of Discrete IGBTs, more chips need to be paralleled to obtain high current ratings. In those cases, Clamped Diodes have to be placed around IGBTs which brings risks, due to voltage/current stresses and difficulty perils in the manufacturing process.



Integrated IGBT module used in IN-DSP Series Modular UPS

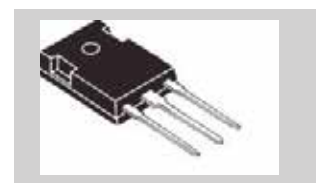


Discrete IGBT chip used in other modular UPSs

Optional Components

- SNMP / Web communication card
- Battery temperature compensation module
- Dust-Proof net
- Parallel kit for second cabinet
- ModBus

Modular UPS System:

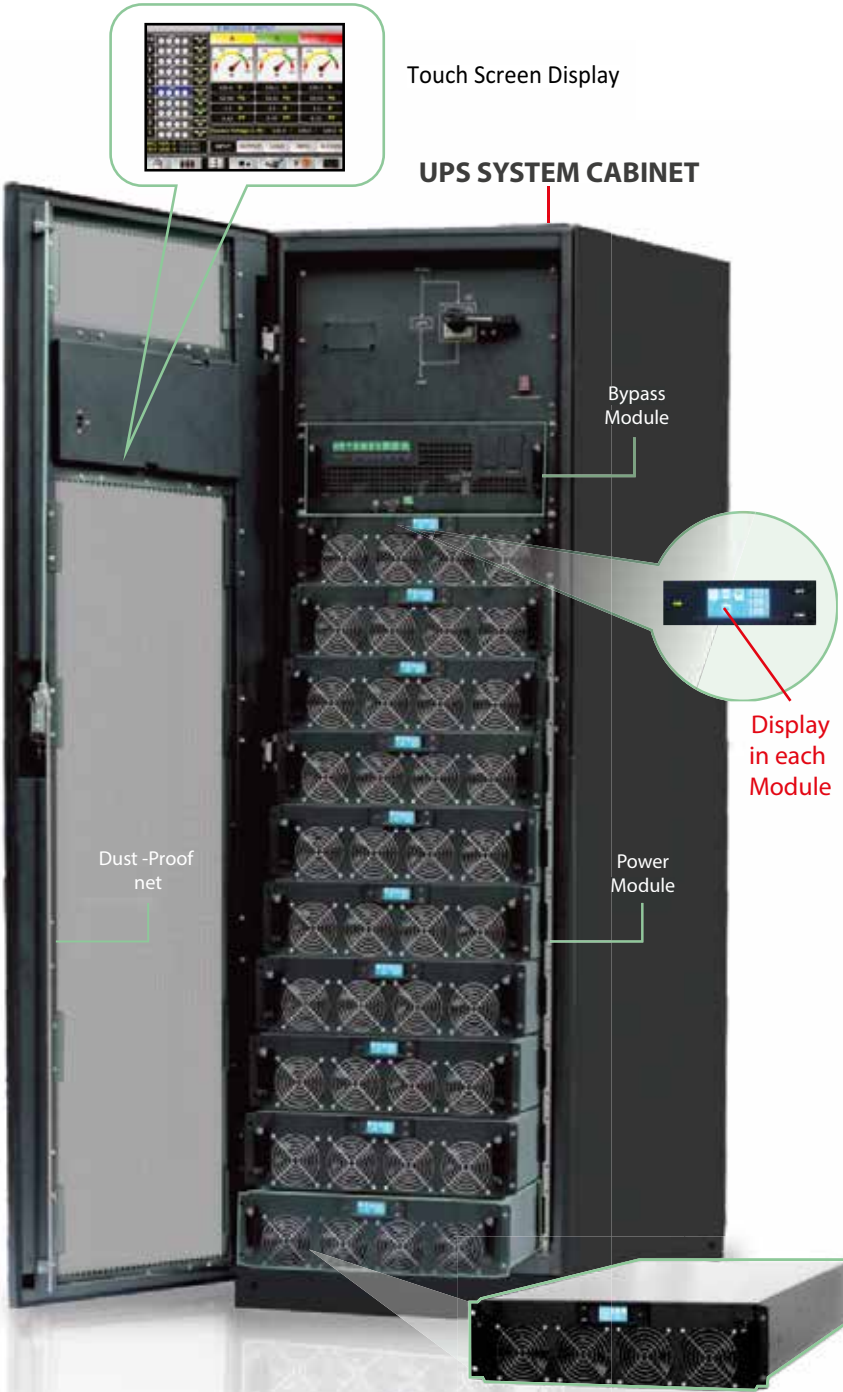

STANDARD BATTERY CABINET



TOUCH SCREEN DISPLAY



MONITORING MODULE



In the Standard Battery Cabinet the size and Amp/Hour of the batteries are configured in accordance to the required back up time, in single or preferably in multiple strings.

IN-DSP SERIES	EACH CABINET SYSTEM GROWS FROM 20 KVA/KW UP TO 200 KVA/KW
Phase	Three Phase + N + G In / Three Phase + N + G Out
Capacity	Grows from 20 to 200 KVA / KW
Electronic Power Modules	20 KVA/KW
Power Factor	Unity (1)
INPUT	
Input Nominal Voltage	200/208/220 VAC (line to line) 3P+N+G
Input Voltage Range	-20 % to +25%
Input Power Factor	At Full Load > 0.99
Input Frequency Range	40 - 70 Hz
Rectifier	PWM IGBT Technology PFC
Total Harmonic Distortion (THDi)	< 3%
OUTPUT	
Output Nominal Voltage	115/120//127 VAC (L-N), 200/208/220 VAC (L-L) ± 1 % (at balanced load) 3P+N+G
Output Frequency	50 - 60 Hz
Power Factor	1
Total Harmonic Distortion (THDv)	Linear Load < 1 % ; Non-linear Load < 3 %
Crest Factor (CF)	3:1
Efficiency	95% (ECO Mode 99%)
Transfer Time	Zero
Inverter	Pure Sinewave Three Level Topology
Overload Capacity	At 105% Long Time Operation, at 110% Load 60 min, 125% Load 10 min, at 150% Load 1 min; > 150% Load 200ms.
BATTERY	
Quantity (12 VDC VRLA)	2 x 10 per string
Type of Battery	12VDC Sealed Lead Acid Batteries
Nominal Voltage	± 120VDC
Charge Power	0-20% of the Device Power (Selectable)
Backup Time	Standard 10 minutes / Other configurations available
COMMUNICATION & MANAGEMENT	
Communication Ports	RS-232, RS-485, SNMP, EPO, Generator Interface, ModBus (opt)
Compatibility	Supports Windows® 2000/2003/XP/Vista/2008, Windows®7, Linux, Unix, and MAC
Display	Graphic LCD + LED, Color Touch Screen and Keyboard
Dry Contacts	Included
GENERAL	
Dimensions UPS Modules & Cabinets (WxDxH) (mm)	600 x 1100 x 2000 mm - 10 Slot.
	460 x 790 x 134mm 20KVA/KW Electronic Module
Weight UPS Cabinet (Kg)	220Kg
Weight UPS Modules (Kg)	34 Kg each 20KVA/KW Electronic Module
Running Humidity & Temperature	0 - 95 % RH (Non-Condensing) @ 0~40°C
Storage Temperature	For UPS - 40~70°C; for Batteries -20~30°C
Acoustic noise level at 1 meter	< 65 dB
Altitude (meters above sea level)	< 3000 meters
Protection Class	IP20
Parallel Operation	Parallel Power increase up to 600 KW/KVA with 3 Cabinets
EPO (Emergency Power Off)	Standard
Insolation Transformer	Optional
STANDARDS & CERTIFICATIONS	
Quality	ISO 9001 ; CE
Compliance	EN50091 (1,2,3); IEC62040 (1,2,3); IEC/EN/AS60950; (IEC/EN/AS60146 series); IEC/EN/ AS61000 series and 60950)

SY-G reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on SY-G products previously or subsequently sold.



A member of SY-G Corporation

www.computerpower.com



February - 2019

Authorized Dealer